


管道限流器(金属) In-line Speed Controller (Metal) Series KAS 2000~6000



规格 Specifications

型号 Model	KAS 2000~6000
使用流体 Fluid	过滤压缩空气 Filtered compressed air
最高使用压力 Maximum operating pressure	1.0 MPa
最低使用压力 Minimum operating pressure	0.05 MPa
保证耐压力 Proof pressure	1.5 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C
调整流量转数 No. of needle rotation turns	8 (KAS 2000~4000)



KAS2000-02




KAS4000-04

型号 Model	接管口径 Port size Rc(PT)	自由流量 Free flow		控制流量 Control flow	
		* 流量 Flow rate (l/min)	有效截面积 Effective sectional area (mm ²)	* 流量 Flow rate (l/min)	有效截面积 Effective sectional area (mm ²)
KAS2000-01	1/8	340	5.2	250	3.8
KAS2000-02	1/4	340	5.2	250	3.8
KAS4000-02	1/4	1670	25.5	1670	25.5
KAS4000-03	3/8	1670	25.5	1670	25.5
KAS4000-04	1/2	1670	25.5	1670	25.5
KAS5000-04	1/2	-	106	-	116
KAS5000-06	3/4	-	123	-	154
KAS6000-06	3/4	-	151	-	164
KAS6000-10	1	-	258	-	230

* 进气压力为 0.5MPa, 流体温度 20°C 的情况下。
At supply pressure 0.5 MPa and fluid temperature 20°C .


外形尺寸图 Dimensions (mm)

KAS2000

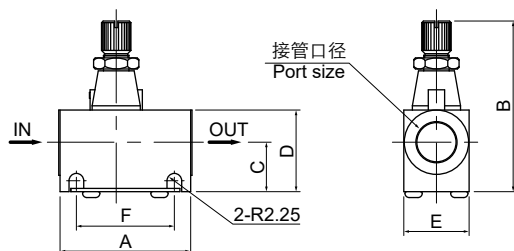


型号 Model	接管口径 Port size Rc(PT)	A	B	C	D	E	F
KAS2000-01	1/8	40	51	15	21.5	16	30
KAS2000-02	1/4	40	53	17	25	20	30

KAS4000

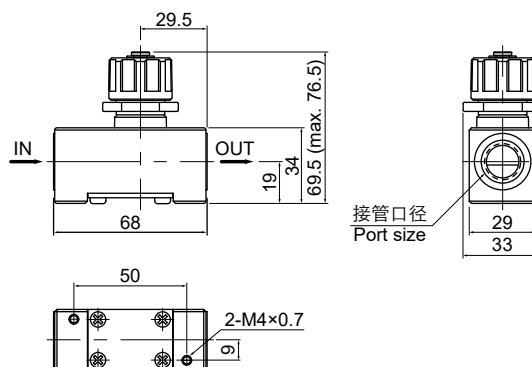

KAS5000, KAS6000

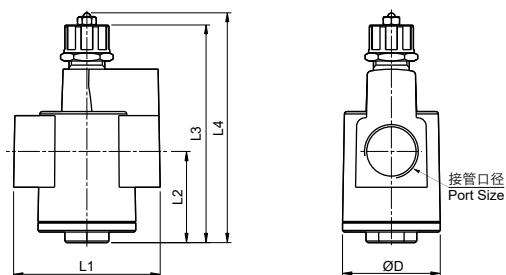

型号 Model	接管口径 Port size Rc(PT)	D	L1	L2	L3	L4
KAS5000-04/06	1/2, 3/4	48	74	43	105	115
KAS6000-06/10	3/4, 1	60	90	56	148	158